

TK550G 標準ブーム/ショートブーム能力比較表

標準

t


	各段ブーム長さ			
	10.0	16.7	23.4	30.1
3.0	55.0	28.0	22.0	14.0
3.5	50.0	28.0	22.0	14.0
4.0	42.5	28.0	22.0	14.0
4.5	36.5	28.0	22.0	14.0
5.0	31.7	28.0	22.0	14.0
5.5	26.9	26.7	22.0	14.0
6.0	23.4	23.1	22.0	14.0
6.5	20.6	20.3	20.2	14.0
7.0	18.3	18.0	17.9	13.5
7.5	12.5	16.2	16.0	13.0
7.7	11.9	15.5	15.4	12.8
8.0		14.6	14.5	12.5
8.5		13.3	13.2	12.0
9.0		12.3	12.0	11.5
9.5		11.3	11.0	11.0
10.0		10.4	10.2	10.7
11.0		9.0	8.7	9.2
12.0		7.8	7.6	8.1
13.0		6.8	6.6	7.1
14.0		6.0	5.8	6.3
14.4		5.6	5.5	6.0
15.0			5.1	5.6
16.0			4.6	5.0
17.0			4.1	4.5
18.0			3.7	4.1
19.0			3.3	3.7
20.0			2.9	3.3
21.1			2.5	3.0
22.0				2.8
24.0				2.2
26.0				1.8
27.8				1.4

ショートブーム


t

	各段ブーム長さ			
	7.7	12.1	16.5	20.9
3.0	55.0	28.0	22.0	14.0
3.5	50.0	28.0	22.0	14.0
4.0	42.5	28.0	22.0	14.0
4.5	36.5	28.0	22.0	14.0
5.0	31.6	28.0	22.0	14.0
5.5	16.9	26.6	22.0	14.0
6.0		23.1	22.0	14.0
6.5		20.3	20.1	14.0
7.0		18.0	17.8	13.5
7.5		16.1	16.0	13.0
8.0		14.6	14.4	12.5
8.5		13.3	13.1	12.0
9.0		12.3	12.0	11.5
9.5		11.2	11.0	11.0
9.8		9.5		
10.0			10.1	10.7
11.0			8.7	9.2
12.0			7.5	8.0
13.0			6.6	7.1
14.0			5.8	6.2
14.2			5.6	
15.0				5.6
16.0				5.0
17.0				4.5
18.0				4.0
18.6				3.8


基本ブーム性能

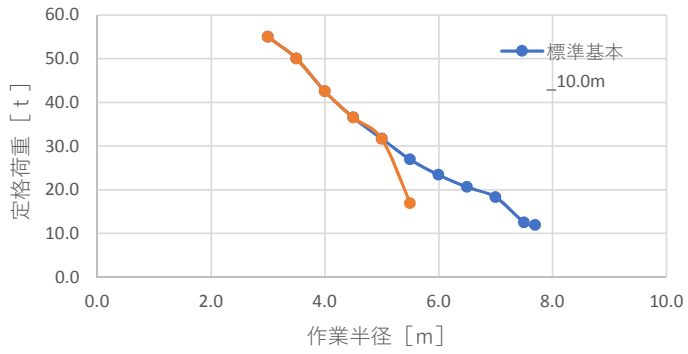

2/3段ブーム中間時性能

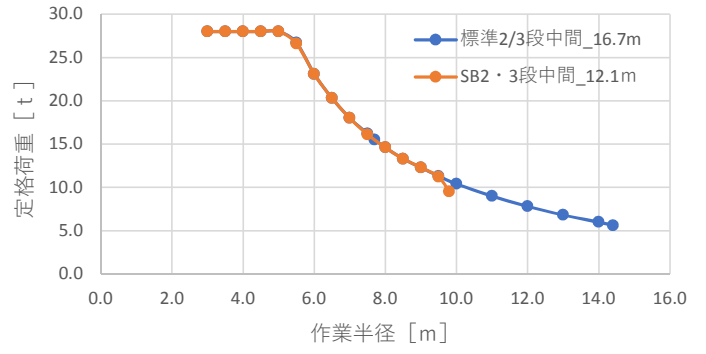

2/3段ブーム伸長時性能

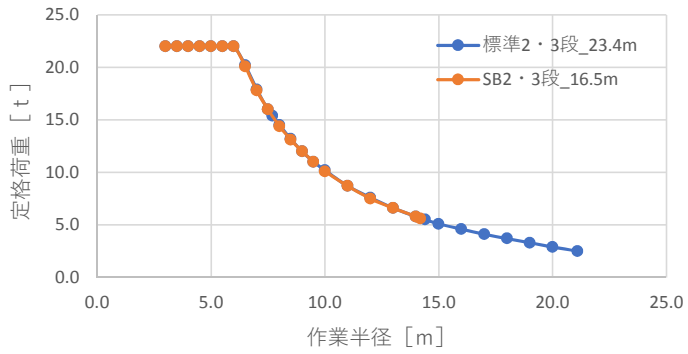

4段フルブーム時性能

